

## Optimization of embedded software's energy Consumption

### Motivation

Reducing energy consumption is becoming more and more important for the development of battery powered devices. Characteristics such as stand-by or operating time are crucial for the operation of equipment like mobile phones. Hence comprehensive measures for reducing energy consumption are an integral part of designing battery-powered devices.

Typical measures are:

- The use of power-saving components with power-saving features
- High level of integration
- Variable CPU frequencies
- Variable power supply
- The use of microcontrollers with power-saving features, cache and on-chip memory

However, an optimal reduction of energy consumption can succeed only if the software that controls the equipment consistently exploits all possible power-saving features of the hardware. Energy is the product of current, voltage and time. Each of these parameters can be influenced by the control software. Therefore software developers have to constantly attempt to find the optimal settings for these three parameters in the respective operating mode of the application. For instance you might ask yourself the following questions:

- Is the microcontroller in the right power-saving mode?
- How do program changes affect power consumption?
- Are there any unexpected power peaks?

These kind of checks require a test set-up that measures, records and analyzes the program and data flow of the control software as well as current and voltage gradients. Additionally all these recordings have to be related to each other in a simple way. At the Embedded World 2007, LAUTERBACH as the first manufacturer worldwide presents a powerful and easy-touse solution addressing these issues.

### Requirements

To be able to specify the energy consumption for each line of code, the following data has to be collected:

- The chronological program flow of the control software; typically a debugger with real-time trace capabilities is used for this task nowadays.
- The current and voltage gradients during the program runtime; a logic analyzer with an analog/digital probe is suitable as a measuring device for this purpose.

The main challenge is to correlate the measurement of the program flow with the measurement of current and voltage. If non-integrated equipment from different manufacturers is used, this correlation is enormously complicated if not impossible. Analysis and statistical evaluation is also very difficult and inconvenient.

The solution to this problem and the development of suitable, easy-to-use display and analysis methods is at heart of LAUTERBACH's innovation.


## Solution

LAUTERBACH's integrated power measurement solution, consisting of a debugger, a realtime trace and a logic analyzer provides a precise time stamp counter for each of these devices, which are synchronized at program start. Each recording is time-stamped and can therefore be correlated with the recordings of the other measuring devices, thus allowing determining the power consumption of each line of code.

To acquire the data for current or voltage gradients a TRACE32 PowerTrace II or PowerIntegrator can be extended with a TRACE32 AnalogProbe offering the following features:

- Real-time measurement of up to 4 voltage channels and 3 current channels
- Real-time triggers on limits and measurement ranges for voltage, current and power

To measure the current, a shunt resistor is needed in the application's supply cable. The voltage drop at this resistor depends on its value and is proportional to the current through the resistor. The voltage drop at the shunt resistor is measured by the TRACE32 AnalogProbe. This method of measuring is commonly used and supported by many evaluation platforms. Current and voltage channels and the shunt resistor values are controlled through a graphical user interface as shown below. The same applies to the power channels, which are calculated from the current and voltage measurements. Alternatively, a fixed voltage can be specified for the calculation.

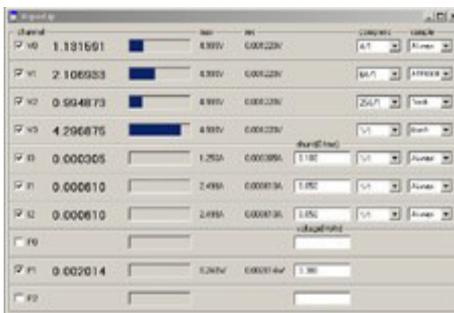



range	tree	energy	min	max	avr	count	intern%	1%	2%	5%	10%	20%	50%	100%
(root)	(root)	26.893mJ	0.000	26.893mJ	26.893mJ	1.(-2)	0.0018							
iberg\SINUS_DO_C\LED_off	LED_off	16.123uJ	8.032uJ	8.091uJ	8.062uJ	2.	0.059%							
iberg\SINUS_DO_C\LED1_on	LED1_on	740.645uJ	370.321uJ	370.324uJ	370.322uJ	2.	2.754%							
iberg\SINUS_DO_C\LED2_on	LED2_on	1.493mJ	746.520uJ	746.502uJ	746.561uJ	2.	5.552%							
iberg\SINUS_DO_C\LED3_on	LED3_on	2.238mJ	1.119mJ	1.119mJ	1.119mJ	2.	8.319%							
iberg\SINUS_DO_C\LED4_on	LED4_on	2.980mJ	1.490mJ	1.490mJ	1.490mJ	2.	11.079%							
iberg\SINUS_DO_C\LED5_on	LED5_on	3.708mJ	1.854mJ	1.854mJ	1.854mJ	2.	13.788%							
iberg\SINUS_DO_C\LED6_on	LED6_on	4.432mJ	2.216mJ	2.216mJ	2.216mJ	2.	16.478%							
iberg\SINUS_DO_C\LED7_on	LED7_on	5.144mJ	2.572mJ	2.572mJ	2.572mJ	2.	19.125%							
iberg\SINUS_DO_C\LED8_on	LED8_on	5.854mJ	2.927mJ	2.927mJ	2.927mJ	2.	21.767%							
erg\SINUS_DO_C\Func_Wave	func_Wave	288.339uJ	60.494uJ	129.294uJ	96.113uJ	3.(-2)	1.072%							

voltage and power trigger events will be defined. Their appearance can be used by the trigger unit to enable or disable the recording (selective trace). Alternatively, a trigger signal can stop the program in real-time. This helps the user to quickly determine the causes of current peaks.

## Summary

The integrated measurement solution for energy analysis gives developers a powerful, easy-to-use tool for detecting the relationship between program code and its current/power consumption. The new features are integrated in the existing user interface. Analysis hardware that is already deployed in the field can be easily extended. Close cooperation with important mobile phone manufacturers has ensured a practical implementation. Again LAUTERBACH has proved its innovative skills in the field of development tools for the embedded processor market. By integrating new, innovative solutions such as the TRACE32 AnalogProbe in the existing modular concept, LAUTERBACH is constantly adding value to existing tool sets that are already deployed at customer sites.

Author: Dipl. Ing. Elmar Stahleder, June 2007